
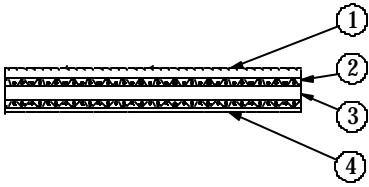


Technical Data Sheet	PolyBelt HUT-250	NITTA CORP. 	
Construction		No.	Material 1 Hard PU (Green) 2 Polyamide Fabric 3 Polyamide Film 4 NBR coating (Green)
Item	Description	Measuring Conditions	
Anti-Static Property	Yes		
Dimensions Thickness Width Length	1.30mm 5 ~ 300mm 300 ~ 100,000mm		
Joint Description	Skived joint Adhesive Polybond A and E		
Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass	60N/mm W 20% 1% 3.0N/mm W 20mm Approx. 80% 0 ~ +80°C 0.3 ~ 0.4 (PU) 0.5 ~ 0.6 (Rubber) 1.6kg/m ²		Test Speed 50 mm/min Ambient condition 20°Cx60% Measured on a Steel Plate Measured on a Steel Plate
Features and Main Applications			
Remarks			