
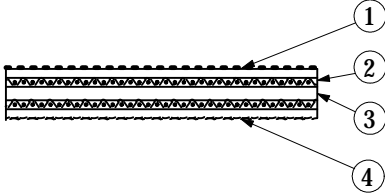


<p>Technical Data Sheet</p>	<p>PolyBelt TFL-10SH</p>	<p>NITTA CORP. </p>	
<p>Construction</p>		<p>No.</p>	<p>Material</p> <ol style="list-style-type: none"> 1 Soft NBR (Taffeta structured, Green) 2 Polyamide Fabric 3 Polyamide Film 4 Soft NBR (Textured Pattern, Gray)
<p>Item</p>	<p>Description</p>	<p>Measuring Conditions</p>	
<p>Anti-Static Property</p>	<p>Yes</p>		
<p>Dimensions</p> <p>Thickness Width Length</p>	<p>2.60mm 10 ~ 300mm 300 ~ 100,000mm</p>		
<p>Joint Description</p>	<p>Skived joint Adhesive Polybond A and E</p>		
<p>Physical Properties</p> <p>Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>390N/mm W 20% 2% 39.0N/mm W 70mm Approx. 80% - 20 ~ +80°C 0.7 ~ 0.8 (Green) 0.7 ~ 0.8 (Gray) 2.8kg/m²</p>		<p>Test Speed 50 mm/min Ambient condition 20°C×60%</p> <p>Measured on a Steel Plate Measured on a Steel Plate</p>
<p>Features and Main Applications</p>	<p>Higher friction coefficient of the surface .</p>		
<p>Remarks</p>			