
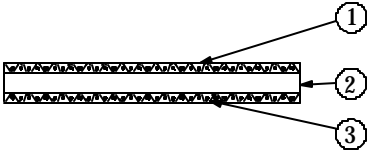


Technical Data Sheet	PolyBelt TTA-750	NITTA CORP. 	
Construction		No. 1 2 3	Material Polyamide Fabric(Blue) Polyamide Film Polyamide Fabric(Blue)
Item	Description	Measuring Conditions	
Anti-Static Property	No		
Dimensions Thickness Width Length	1.55mm 5 ~ 300mm 300 ~ 100,000mm		
Joint Description	Skived joint Adhesive Polybond A		
Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass	225N/mm W 20% 1% 11.2N/mm W 50mm Approx. 80% 0 ~ +80°C 0.2 ~ 0.25 (Blue) 0.2 ~ 0.25 (Blue) 1.4kg/m ²		Test Speed 50 mm/min Ambient condition 20°Cx60% Measured on a Steel Plate Measured on a Steel Plate
Features and Main Applications	Both sides are covered by low friction coefficient fabrics A belt for accumulation conveyer Both side fabrics are Non-fray treated		
Remarks			