
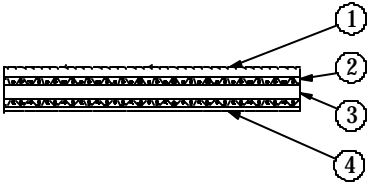


Technical Data Sheet	PolyBelt <b>HUT-750</b>	NITTA CORP. 	
Construction		No.	Material
		1 2 3 4	Hard PU (Green) Polyamide Fabric Polyamide Film NBR coating ( Green)
Item	Description	Measuring Conditions	
Anti-Static Property	Yes		
<b>Dimensions</b> Thickness Width Length	1.90mm 5 ~ 300mm 300 ~ 100,000mm		
<b>Joint Description</b>	Skived joint Adhesive Polybond A and E		
<b>Physical Properties</b> Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass	225N/mm W 20% 1% 11.2N/mm W f 50mm Approx. 80% 0 ~ +80°C 0.3 ~ 0.4 (Rubber) 0.5 ~ 0.6 (Rubber) 2.2kg/m <sup>2</sup>	Test Speed 50 mm/min Ambient condition 20°Cx60% Measured on a Steel Plate Measured on a Steel Plate	
<b>Features and Main Applications</b>			
<b>Remarks</b>			