
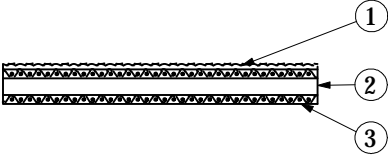


Technical Data Sheet	PolyBelt KSG-350	NITTA CORP. 	
Construction		No.	Material
Item	Description	Measuring Conditions	
Anti-Static Property	Yes		
Dimensions Thickness Width Length	1.00mm 5 ~ 300mm 300 ~ 100,000mm		
Joint Description	Skived Joint Adhesive Polybond A		
Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass	105 N/mm W 20% 2% 10.5 N/mm W 35mm Approx. 80% 0 ~ + 80 0.3 ~ 0.4 (Green) 0.2 ~ 0.25 (Fabric) 0.9 kg/m ²	Test Speed 50 mm/min Ambient condition 20° X 60% Measured on a Steel Plate Measured on a Steel Plate	
Features and Main Applications	A spindle tape for large package sectional drives. Twisting machines for tire cords.		
Remarks			