
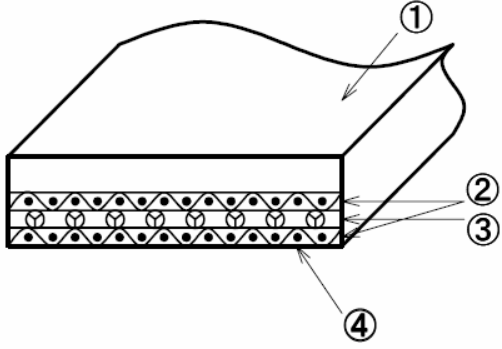


Technical Data Sheet		Belt type	SE-A-NR-D	Nitta Corporation of America 12-Nov-02	
Main uses	Feeder belts				
No.	Item	Description		Remarks	
1	Specification	Construction		<ul style="list-style-type: none"> 1) Blue natural rubber (Ground surface) 2) Polyamide fabric 3) Polyester cord 4) Black chloroprene rubber (Impregnated surface) 	
2	Dimensions	Antistatic	No		
		Width	7 to 400 mm		
		Length	400 to 1970 mm		By molds
		Thickness	4 mm		
		Joint	Seamless		
3	Properties	Tensile strength	58.8 N/mm width	Test speed: 10%/min Environment: 23°C@50%	
		Elongation at break	10 %		
		Standard elongation	0.5 %		
		Shaft load	7.35N/mm width		At 0.5% elongation 23°C @ 50%
		Minimum Pulley Dia.	40 mm		
		Temperature range	-20 to +80 °C		
		Coefficient of friction	Ground surface approx. 1.5		Against cardboard
			Impregnated surface 0.1 to 0.3		Against stainless steel or aluminum
Mass	5 kg/m ²				
4	Features				