
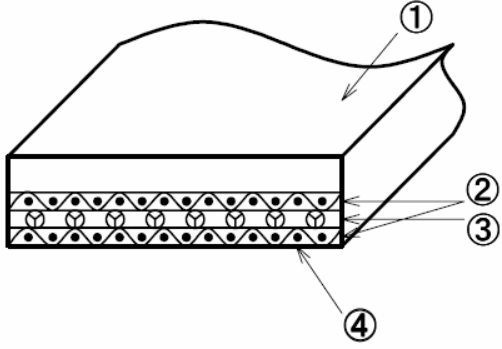


Technical Data Sheet		Belt type	<b>SE-A-WN</b>	Nitta Corporation of America 1-Jan-03	
Main uses	Feeder belts Sack machines				
No.	Item	Description		Remarks	
1	Specification	Construction		<ul style="list-style-type: none"> <li>1) white natural rubber (Ground surface)</li> <li>2) Polyamide fabric</li> <li>3) Polyester cord</li> <li>4) white chloroprene rubber (glossy surface)</li> </ul>	
2	Dimensions	Antistatic	No		
		Width	7 to 400 mm		
		Length	400 to 1970 mm		By molds
		Thickness	8 mm		Thickness available 2 to 12
		Joint	Seamless		
3	Properties	Tensile strength	58.8 N/mm width	Test speed: 10%/min Ambient condition: 23°C@50%	
		Elongation at break	10 %		
		Standard elongation	0.5 %		
		Shaft load	7.35N/mm width		At 0.5% elongation 23°C @ 50%
		Minimum Pulley Dia.	80 mm		
		Temperature range	-20 to +60 °C		
		Coefficient of friction	Ground surface approx. 2.0	Ambient condition 23°C @ 50%	
			Impregnated surface 0.1 to 0.3		Against stainless steel or aluminum
Mass	10.2 kg/m <sup>2</sup>				
4	Features	High friction Soft surface			