
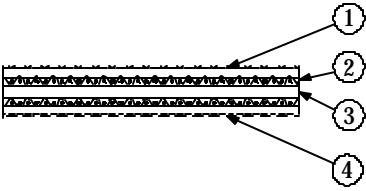


<p>Technical Data Sheet</p>	<p>PolyBelt XH-1000-4</p>	<p>NITTA CORP. </p>									
<p>Construction</p>		<p>No.</p>	<p>Material</p> <table border="1"> <tr> <td>1</td> <td>Soft NBR(Textured Pattern, Blue)</td> </tr> <tr> <td>2</td> <td>Polyamide Fabric</td> </tr> <tr> <td>3</td> <td>Polyamide Film</td> </tr> <tr> <td>4</td> <td>Soft NBR(Textured Pattern, Blue)</td> </tr> </table>	1	Soft NBR(Textured Pattern, Blue)	2	Polyamide Fabric	3	Polyamide Film	4	Soft NBR(Textured Pattern, Blue)
1	Soft NBR(Textured Pattern, Blue)										
2	Polyamide Fabric										
3	Polyamide Film										
4	Soft NBR(Textured Pattern, Blue)										
<p>Item</p>	<p>Description</p>	<p>Measuring Conditions</p>									
<p>Anti-Static Property</p>	<p>Yes</p>										
<p>Dimensions Thickness Width Length</p>	<p>4.00mm 10 ~ 280mm 300 ~ 100,000mm</p>										
<p>Joint Description</p>	<p>Skived joint Adhesive Polybond A and E</p>										
<p>Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>300N/mm W 20% 1% 15.0N/mm W 75mm Approx. 80% 0 ~ +80°C 0.5 ~ 0.6 (Blue) 0.5 ~ 0.6 (Blue) 4.4kg/m²</p>	<p>Test Speed 50 mm/min Ambient condition 20°Cx60%</p> <p>Measured on a Steel Plate Measured on a Steel Plate</p>									
<p>Features and Main Applications</p>	<p>Belt for Folder Gluer Machines</p>										
<p>Remarks</p>											