
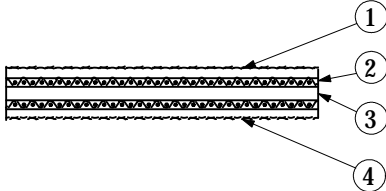


<p><b>Technical Data Sheet</b></p>	<p>PolyBelt <b>XH-500-4</b></p>	<p><b>NITTA CORP.</b> </p>	
<p><b>Construction</b></p>		<p>No.</p>	<p>Material</p>
<p><b>Item</b></p>	<p>Description</p>	<p>Measuring Conditions</p>	
<p><b>Anti-Static Property</b></p>	<p>Yes</p>		
<p><b>Dimensions</b> Thickness Width Length</p>	<p>4.00mm 5 ~ 280mm 300 ~ 100,000mm</p>		
<p><b>Joint Description</b></p>	<p>Skived joint Adhesive Polybond A and E</p>		
<p><b>Physical Properties</b> Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>150N/mm W 20% 1% 7.5N/mm W 35mm Approx. 80% 0 ~ +80°C 0.5 ~ 0.6 (Blue) 0.5 ~ 0.6 (Blue) 4.3kg/m<sup>2</sup></p>	<p>Test Speed 50 mm/min Ambient condition 20°C×60%  Measured on a Steel Plate Measured on a Steel Plate</p>	
<p><b>Features and Main Applications</b></p>	<p>Belt for Folder Gluer Machines</p>		
<p><b>Remarks</b></p>			