
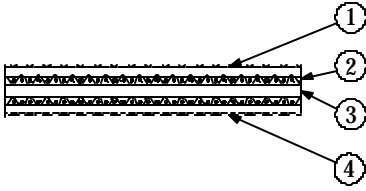


<b>Technical Data Sheet</b>	PolyBelt  <b>XH-750-3</b>	NITTA CORP. 	
<b>Construction</b>		No.	Material 1 Soft NBR(Textured Pattern, Blue) 2 Polyamide Fabric 3 Polyamide Film 4 Soft NBR(Textured Pattern, Blue)
<b>Item</b>	Description	Measuring Conditions	
<b>Anti-Static Property</b>	Yes		
<b>Dimensions</b> Thickness Width Length	3.00mm 5 ~ 280mm 300 ~ 100,000mm		
<b>Joint Description</b>	Skived joint Adhesive Polybond A and E		
<b>Physical Properties</b> Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass	225N/mm W 20% 1% 11.25N/mm W 60mm Approx. 80% 0 ~ +80°C 0.5 ~ 0.6 (Blue) 0.5 ~ 0.6 (Blue) 3.3kg/m <sup>2</sup>		Test Speed 50 mm/min Ambient condition 20°Cx60%  Measured on a Steel Plate Measured on a Steel Plate
<b>Features and Main Applications</b>	Belt for Folder Gluer Machines		
<b>Remarks</b>			