
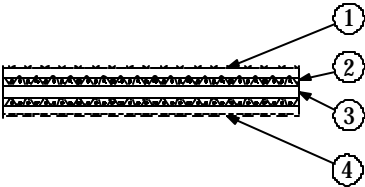


Technical Data Sheet	PolyBelt XH-750-4	NITTA CORP. 	
Construction		No.	Material 1 Soft NBR(Textured Pattern, Blue) 2 Polyamide Fabric 3 Polyamide Film 4 Soft NBR(Textured Pattern, Blue)
Item	Description	Measuring Conditions	
Anti-Static Property	Yes		
Dimensions Thickness Width Length	4.00mm 5 ~ 280mm 300 ~ 100,000mm		
Joint Description	Skived joint Adhesive Polybond A and E		
Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass	225N/mm W 20% 1% 11.25N/mm W 70mm Approx. 80% 0 ~ +80°C 0.5 ~ 0.6 (Blue) 0.5 ~ 0.6 (Blue) 4.4kg/m ²		Test Speed 50 mm/min Ambient condition 20°Cx60% Measured on a Steel Plate Measured on a Steel Plate
Features and Main Applications	Belt for Folder Gluer Machines		
Remarks			