
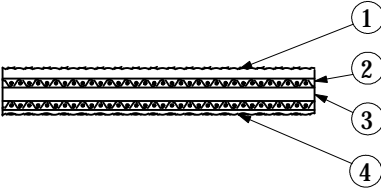


<p><b>Technical Data Sheet</b></p>	<p>PolyBelt <b>HA-750</b></p>	<p>NITTA CORP. </p>	
<p><b>Construction</b></p>		<p>No.</p>	<p>Material</p> <ol style="list-style-type: none"> <li>1 NBR(Textured Pattern, Blue)</li> <li>2 Polyamide Fabric</li> <li>3 Polyamide Film</li> <li>4 NBR(Textured Pattern, Blue)</li> </ol>
<p><b>Item</b></p>	<p>Description</p>	<p>Measuring Conditions</p>	
<p><b>Anti-Static Property</b></p>	<p>Yes</p>		
<p><b>Dimensions</b> Thickness Width Length</p>	<p>3.75mm 10 ~ 300mm 300 ~ 100,000mm</p>		
<p><b>Joint Description</b></p>	<p>Skived joint Adhesive Polybond A and E</p>		
<p><b>Physical Properties</b> Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction  Mass</p>	<p>225N/mm W 20% 2% 22.5N/mm W 65mm Approx. 80% - 20 ~ +80% 0.5 ~ 0.6 (Blue) 0.5 ~ 0.6 (Blue) 4.1 kg/m<sup>2</sup></p>		<p>Test Speed 50 mm/min Ambient condition 20°Cx60%  Measured on a Steel Plate Measured on a Steel Plate</p>
<p><b>Features and Main Applications</b></p>			
<p><b>Remarks</b></p>			