
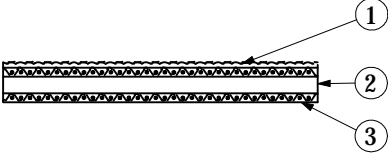


<b>Technical Data Sheet</b>	PolyBelt <b>KSG-250</b>	NITTA CORP. 	
<b>Construction</b>		<b>No.</b>	<b>Material</b> 1 NBR coating( Green) 2 Polyamide Film 3 Special Fabric
<b>Item</b>	<b>Description</b>	<b>Measuring Conditions</b>	
<b>Anti-Static Property</b>	Yes		
<b>Dimensions</b> Thickness Width Length	0.85mm 5 ~ 300mm 300 ~ 100,000mm		
<b>Joint Description</b>	Skived joint Adhesive Polybond A		
<b>Physical Properties</b> Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 1% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction  Mass	60N/mm W 20% 1% 3.0N/mm W 20mm Approx. 80% 0 ~ +80°C 0.3 ~ 0.4 (Green) 0.2 ~ 0.25 (Fabric) 0.8kg/m <sup>2</sup>	Test Speed 50 mm/min Ambient condition 20°C×60%  Measured on a Steel Plate Measured on a Steel Plate	
<b>Features and Main Applications</b>	A spindle tape for sectional drives.		
<b>Remarks</b>			