
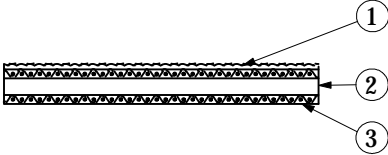


<p><b>Technical Data Sheet</b></p>	<p>PolyBelt <b>KSG-350</b></p>	<p>NITTA CORP. </p>	
<p><b>Construction</b></p>		<p>No.</p>	<p>Material</p>
<p><b>Item</b></p>	<p>Description</p>	<p>Measuring Conditions</p>	
<p><b>Anti-Static Property</b></p>	<p>Yes</p>		
<p><b>Dimensions</b> Thickness Width Length</p>	<p>1.00mm 5 ~ 300mm 300 ~ 100,000mm</p>		
<p><b>Joint Description</b></p>	<p>Skived Joint Adhesive Polybond A</p>		
<p><b>Physical Properties</b> Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>105 N/mm W 20% 2% 10.5 N/mm W 35mm Approx. 80% 0 ~ + 80 0.3 ~ 0.4 (Green) 0.2 ~ 0.25 (Fabric) 0.9 kg/m<sup>2</sup></p>	<p>Test Speed 50 mm/min Ambient condition 20° X 60%  Measured on a Steel Plate Measured on a Steel Plate</p>	
<p><b>Features and Main Applications</b></p>	<p>A spindle tape for large package sectional drives. Twisting machines for tire cords.</p>		
<p><b>Remarks</b></p>			