
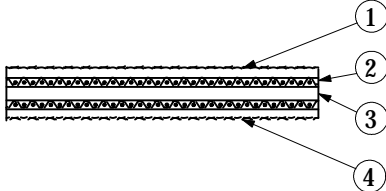


<p>Technical Data Sheet</p>	<p>PolyBelt MH-3000</p>	<p>NITTA CORP. </p>	
<p>Construction</p>		<p>No.</p>	<p>Material</p>
<p>Item</p>	<p>Description</p>	<p>Measuring Conditions</p>	
<p>Anti-Static Property</p>	<p>Yes</p>		
<p>Dimensions Thickness Width Length</p>	<p>5.50mm 10mm ~ 280mm 1,000mm ~ 50,000mm</p>		
<p>Joint Description</p>	<p>Skived joint Adhesive Polybond A and E</p>		
<p>Physical Properties Tensile Strength Elongation at Break Standard Elongation Shaft load at e= 2% Minimum Pulley Diameter Efficiency of Joint Service Temperature Range Coefficient of Friction Mass</p>	<p>900N/mm W 20% 2% 90.0N/mm W 240mm Approx. 80% - 20 ~ +80°C 0.5 ~ 0.6 (Blue) 0.5 ~ 0.6 (Black) 6.5kg/m²</p>	<p>Test Speed 50 mm/min Ambient condition 20°C×60% Measured on a Steel Plate Measured on a Steel Plate</p>	
<p>Features and Main Applications</p>	<p>Heavy Duty Power Transmission Thicker rubber side is used for driving side</p>		
<p>Remarks</p>			